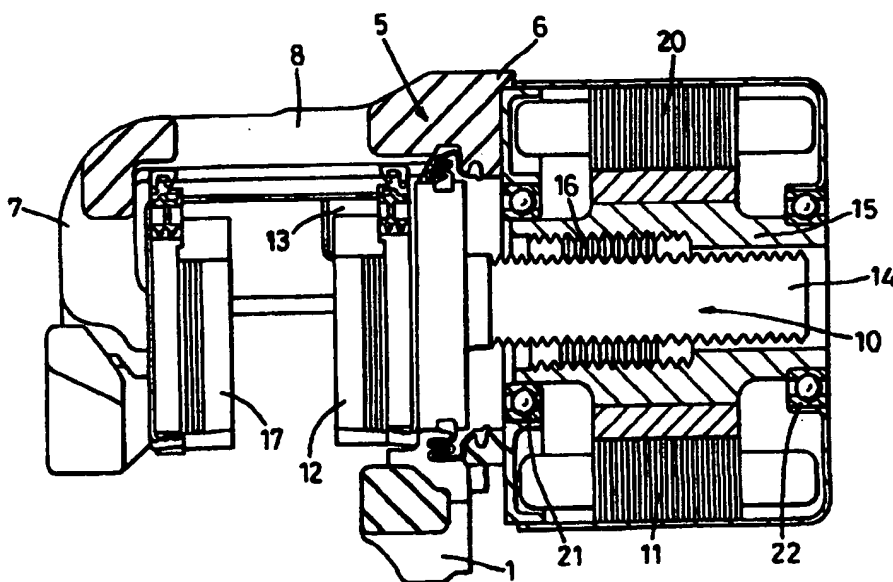


**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup> :</b> <b>F16D 65/16</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 97/17553</b> <b>(43) International Publication Date:</b> 15 May 1997 (15.05.97)
<b>(21) International Application Number:</b> PCT/GB96/02639 <b>(22) International Filing Date:</b> 30 October 1996 (30.10.96) <b>(30) Priority Data:</b> 9522631.2                      4 November 1995 (04.11.95)      GB <b>(71) Applicant (for all designated States except US):</b> LUCAS INDUSTRIES PUBLIC LIMITED COMPANY [GB/GB]; Stratford Road, Solihull, West Midlands B90 4LA (GB). <b>(72) Inventor; and</b> <b>(75) Inventor/Applicant (for US only):</b> HOLDING, Keith, Lawrence [GB/GB]; 17 Townsend Drive, Sutton Coldfield, West Midlands B76 8GJ (GB). <b>(74) Agent:</b> BARKER, BRETTELL & DUNCAN; 138 Hagley Road, Edgbaston, Birmingham B16 9PW (GB).		<b>(81) Designated States:</b> JP, US, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  <b>Published</b> <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

**(54) Title:** IMPROVEMENTS IN ELECTRICALLY-OPERATED DISC BRAKE ASSEMBLIES FOR VEHICLES**(57) Abstract**

An electrically-operated disc brake assembly for vehicles is disclosed in which a friction member (12) is adapted to be applied to a rotatable brake disc by a brake-applying means including an electric motor (11), and transmission means in the form of a linear actuator (10) comprising a screw device adapted to apply an axially-directed brake-applying force to the friction member in response to operation of the motor. The screw device (10) comprises inner and outer co-operating screw-threaded members (14, 15), and one of the members is adapted to co-operate with the armature (15) of the electric motor.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

## IMPROVEMENTS IN ELECTRICALLY-OPERATED DISC BRAKE ASSEMBLIES FOR VEHICLES

This invention relates to improvements in electrically-operated disc  
5 brake assemblies for vehicles of the kind in which a friction member is  
adapted to be applied to a rotatable brake disc by a brake-applying means  
including an electric motor, and transmission means in the form of a  
linear actuator comprising a screw device is adapted to apply an axially-  
directed brake-applying force to the friction member in response to  
10 operation of the motor.

A brake of the kind set forth is known from EP-A-0 339 024. In  
the brake of EP-A-0 339 024 the electric motor is used to drive an input  
to a reduction gearbox, and the gearbox is adapted to translate the high  
15 speed movement of the motor into a controlled high torque output to the  
screw device.

According to our invention in a brake assembly of the kind set  
forth, the screw-device comprises inner and outer co-operating screw-  
20 threaded members, and one of the members is adapted to cooperate with  
the armature of the electric motor.

When the outer member is adapted to cooperate with the armature  
it may comprise the armature of the electric motor itself.  
25

However, when the inner member cooperates with the armature the  
armature may have an axially sliding coupling with an extension of the  
inner member.

Since the motor substantially surrounds the linear actuator such a construction has a number of advantages.

The brake is more compact since its overall length is reduced in comparison with other, similar brakes. This improves package size and eliminates installation problems.

The consequential increase in the diameter of the motor changes the characteristics of the motor in such a way that output torque is increased with corresponding decrease in output speed. The increase in motor diameter thereby changes the motor to a low speed high torque motor enabling us to omit a conventional, reduction, gearbox.

Conveniently the linear actuator is of the fine pitch roller screw type and is relied upon to achieve the necessary reduction between the outer screw-threaded member and the inner screw-threaded member.

In one construction the outer screw-threaded member is journaled at opposite ends for rotation on a pair of axially spaced thrust bearings which take the actual thrust on the member when the brake is applied.

In another construction the thrust on the outer screw-threaded member is taken out on a caliper or housing of the brake through a thrust bearing, the member otherwise being journaled for rotation at axially spaced positions.

In another embodiment the linear actuator acts on the friction member through a load spreader or tappet which acts as a heat shield.

When the inner member is rotated by the armature, the outer member which acts on the friction member is keyed against rotation.

Some embodiments of our invention are illustrated in the  
5 accompanying drawings in which:-

Figure 1 is a longitudinal section through an electrically-operated disc brake assembly for a vehicle;

10 Figure 2 is a longitudinal section similar to Figure 1 but showing a modification;

Figure 3 is a longitudinal section similar to Figure 1 of another brake; and

15 Figure 4 is a longitudinal section through yet another brake.

The disc brake illustrated in Figure 1 of the accompanying drawings comprises a stationary brake carrier 1 fixed to a stationary part  
20 of the vehicle adjacent to one face of a brake disc (not shown) which is rotatable with the wheel of the vehicle.

A caliper or clamping member 5 of generally U-shaped outline including opposed limbs 6 and 7 interconnected by a bridge piece 8 is  
25 slidably mounted on the carrier 1 for movement in an axial direction. The limb 6 houses a brake applying linear actuator 10 in the form of a screw device and an electric motor 11 which substantially encircles the screw device.

A friction member 12 for engagement with an adjacent face of the disc is mounted between the inner end of the screw device 10 and the disc and is guided for axial sliding movement towards and away from the disc on circumferentially spaced guide surfaces 13 in the limb 6. A friction member 17 for engagement with the opposite face of the disc is carried by the limb 7.

The screw device 10 comprises inner and outer screw-threaded members 14 and 15 with the screw-threaded engagement therebetween being constituted by a recirculating roller screw assembly 16, preferably in the form of a fine pitch re-circulating roller screw, although a plain screw would be satisfactory. The inner threaded member 14 is keyed against rotation, conveniently by a connection to the friction member 12 so that rotation of the outer threaded member 15 causes relative axial movement between the two members 14 and 15 to take place.

The electric motor 11 comprises an annular coil 20 which encircles an armature conveniently constituted by the outer screw-threaded member 15. The armature is journaled for rotation at opposite ends in axially spaced thrust members 21 and 22 which act to prevent movement of the armature 15 in an axial direction with respect to the caliper 5.

In the operation of the brake the electric motor 10 is operated to cause rotation of the armature 15 which, due to the roller screw assembly 16, causes the inner screw-threaded member 14 to act as a thrust member and move axially to apply the friction member 12 to the disc. The reaction of the brake applying force is transmitted back through the outer screw-threaded member 15 and onto the caliper through the bearings 21 and 22. This causes bodily movement of the caliper 5 in the opposite

direction, in turn to apply the friction member 17 carried by the limb 7 to the opposite face of the disc.

By the use of a directly operating electric motor 20 and the fine  
5 pitch re-circulating roller screw 16 we are able to achieve a velocity ratio of suitable proportion to provide fine control of the brake clamp load.

In the brake illustrated in Figure 2 of the accompanying drawings  
the outer screw-threaded member 15 is extended inwardly beyond the  
10 inner bearing 21 and is provided with a radial flange 30 which cooperates with a thrust taking face 31 on the limb 6 through a thrust bearing 32. The bearing 22 is omitted and is replaced with a bush 33.

The construction and operation of the brake of Figure 2 is  
15 otherwise the same as that of Figure 1 and corresponding reference numerals have been applied to corresponding parts.

In the brake illustrated in Figure 3 of the accompanying drawings,  
the inner screw-threaded member 14 acts on the friction member 12  
20 through a load spreader or tappet 40 of cup-shaped outline having a recess of greater internal diameter than the external diameter of the complementary end of the screw-threaded member 14. The load spreader or tappet 40 acts to improve the distribution of surface loading on the friction member 12 and acts as a heat shield to protect the motor 10 from  
25 temperature variations at the friction interface.

A caliper boot seal 41 is accommodated in an annular space between the screw-threaded member 14 and the adjacent wall of the recess in the spreader or tappet 40.

A load sensor 42 is incorporated to cooperate with inboard face of the spreader or tappet 40.

5       The spreader or tappet 40 is located or fixed to the screw-threaded member 14 by a thin walled can or diaphragm 43. The can or diaphragm 43 is received in the recess in the spreader or tappet 40 to locate the spreader or tappet 40 with respect to the screw-threaded member 14 but to permit a small amount of relative movement in an axial direction between  
10       the screw-threaded member 14 and the spreader or tappet 40 in order to allow the load sensor 42 to receive the full loading on the spreader or tappet 40 as applied by the screw-threaded member 14.

15       The construction and operation of the brake illustrated in Figure 3 of the drawings is otherwise the same as that of Figure 1 and corresponding reference numerals have been applied to corresponding parts.

20       In the brake illustrated in Figure 4 of the accompanying drawings the outer screw-threaded member comprises a piston 49 working in a cylindrical bore 50 in the limb 6 of the caliper 5 and which is keyed against rotation in the bore by a connection or coupling between the closed outer end of the piston 15 and the friction member 12. The inner screw-threaded member 14 is provided with a screw-threaded axial  
25       extension 51 which has a screw-threaded engagement in an opening 52 in the adjacent end of the limb 6. The extension 51 extends with a clearance into the armature 15 of the motor 10 which is clamped against the outer end of the limb 6. The armature 15 is keyed to the extension 51 by means of a diametrical drive pin 53 which extends through a longitudinally  
30       elongate slot 54 in the extension.



In this construction operation of the electric motor 10 causes rotation of the armature 15 which is accompanied by a corresponding rotation of the inner threaded member 14, in turn causing the piston 49 to advance in the bore 50 at a rate determined by the differences in pitch between the screw-threaded engagement between the extension 51 and the opening 52, and between the external threads on the inner screw-threaded member 14, and internal threads on the outer screw-threaded member 49.

10 As in the previous embodiments a roller screw assembly may be located between the inner and outer screw-threaded members 14, 49.

## CLAIMS


1. An electrically-operated disc brake assembly for vehicles in which a friction member (12) is adapted to be applied to a rotatable brake disc  
5 by a brake-applying means including an electric motor (11), and transmission means in the form of a linear actuator (10) comprising a screw device adapted to apply an axially-directed brake-applying force to the friction member in response to operation of the motor, characterised in that the screw-device comprises inner and outer co-operating screw-  
10 threaded members (14,15), and one of the members is adapted to cooperate with the armature (15) of the electric motor (11).
2. A disc brake according to claim 1, in which the outer member (15) comprise the armature of the electric motor (11) itself.  
15
3. A disc brake according to claim 1, in which the inner member (14) cooperates with the armature (15), and the armature (15) has an axially sliding coupling (53,54) with an extension (51) of the inner member (14).
- 20 4. A disc brake according to any preceding claim, in which the linear actuator is of the fine pitch roller screw type.
5. A disc brake according to any preceding claim, in which the outer screw-threaded member (15) is journaled at opposite ends for rotation on  
25 a pair of axially spaced thrust bearings (21,22) which take the actual thrust on the member when the brake is applied.
6. A disc brake according to any of claims 1-4, in which thrust on the outer screw-threaded member (50) is taken out on a caliper or housing (5)

of the brake through a thrust bearing (32), the member otherwise being journalled for rotation at axially spaced positions.


7. A disc brake according to any of claims 1-4, in which the linear  
5 actuator acts on the friction member (12) through a load spreader or tappet (40) which acts as a heat shield.

8. A disc brake according to claim 1 or claim 3, in which the outer  
member (49) which acts on the friction member (12) is keyed against  
10 rotation.

1/4

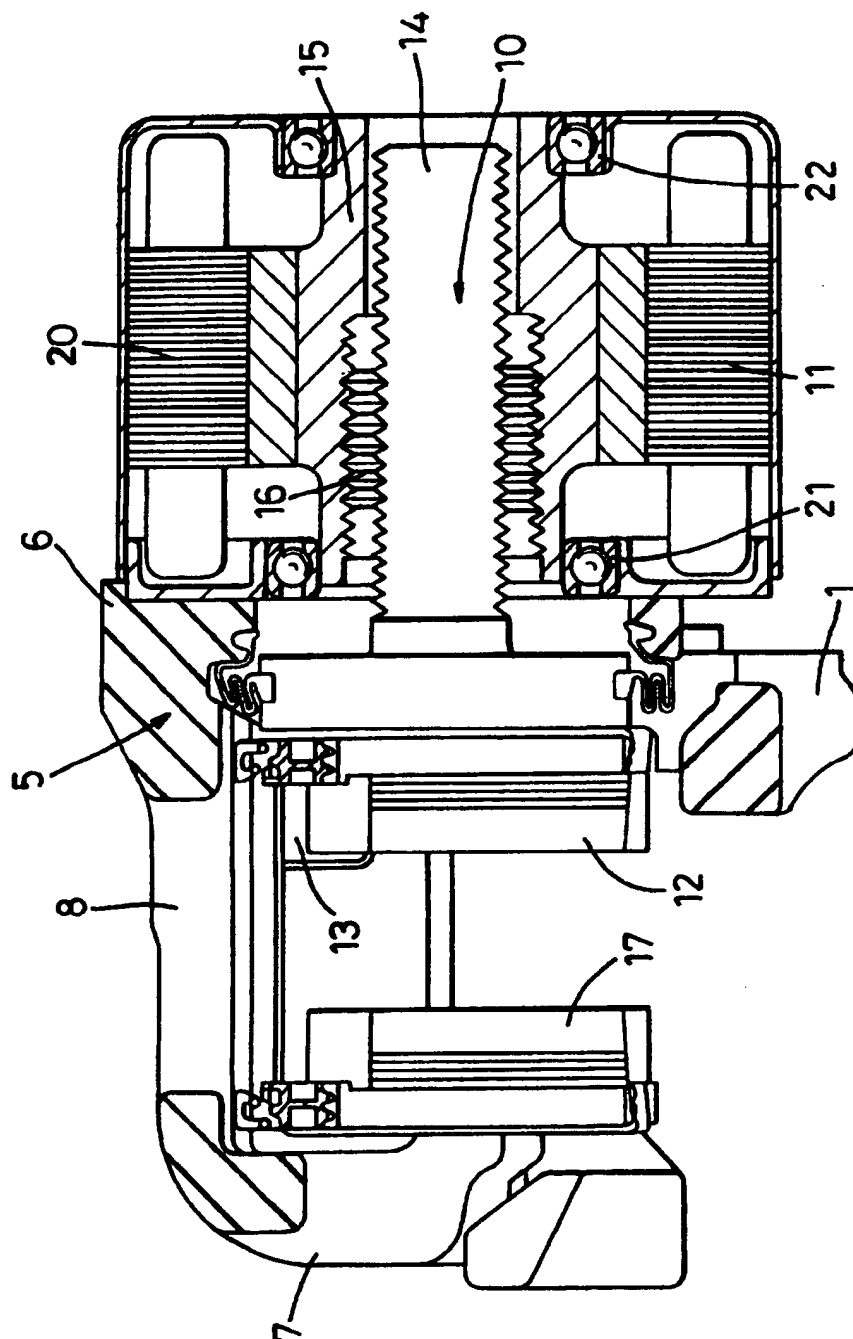*Fig. 1*

2/4

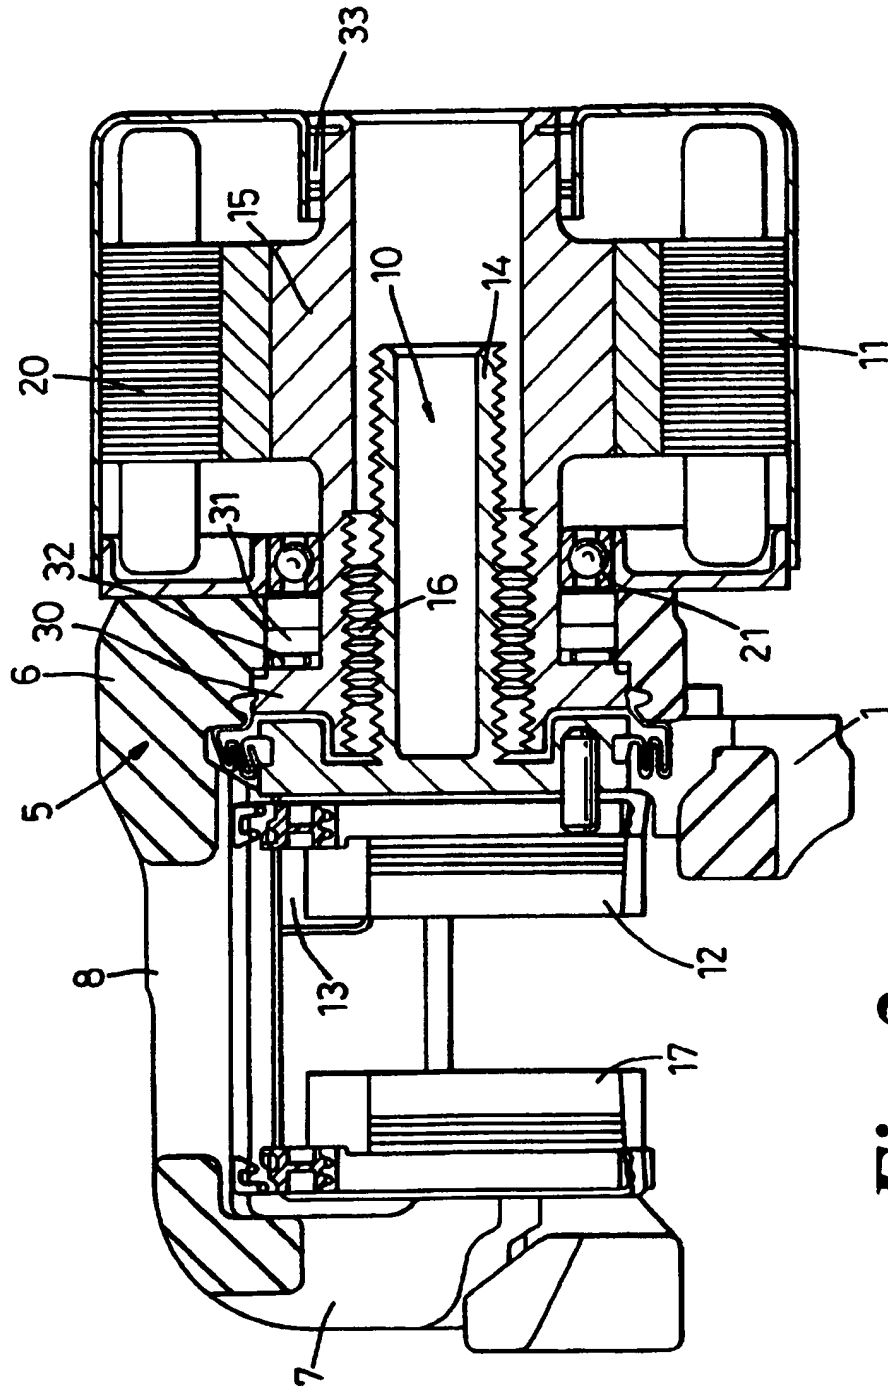

**Fig. 2**

3/4


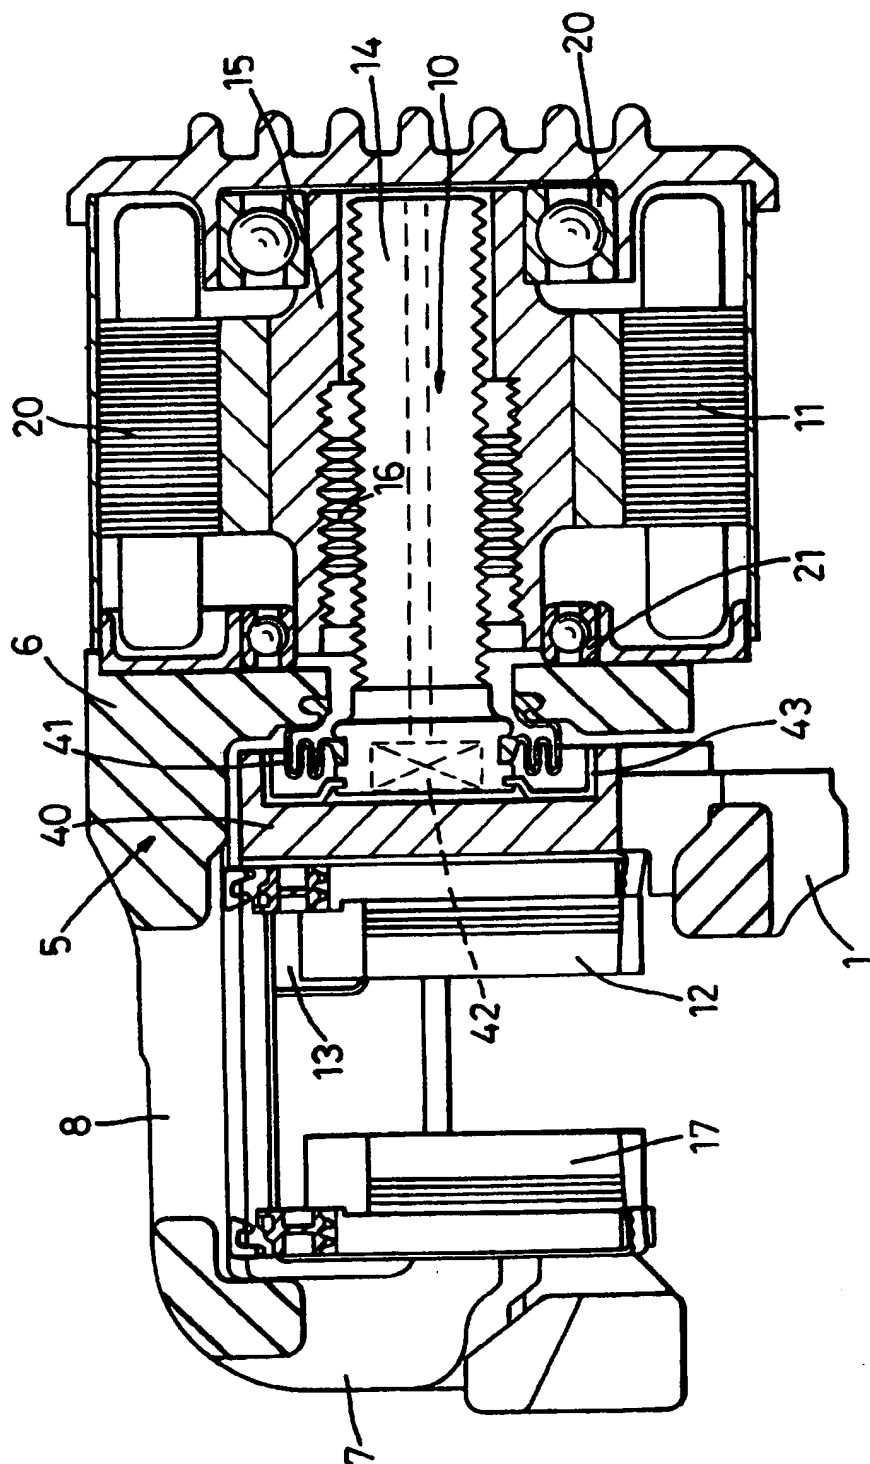


Fig. 3

4/4

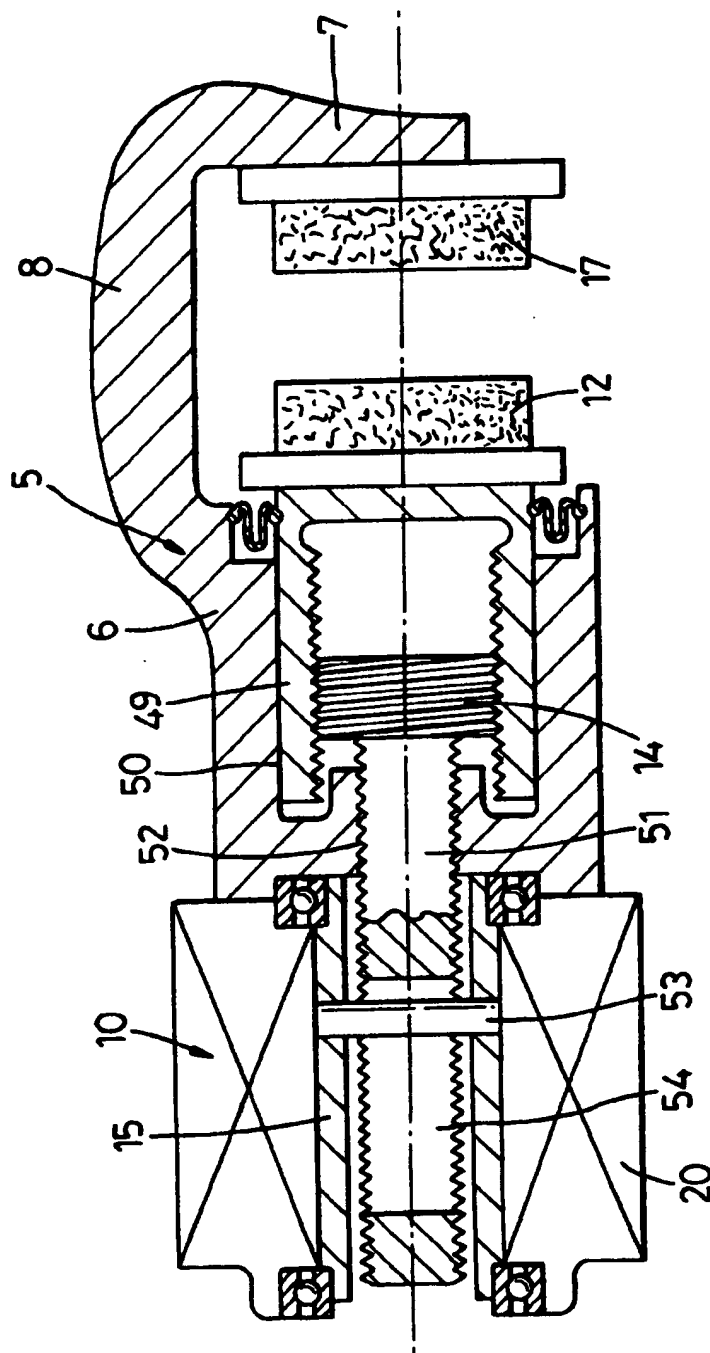

*Fig. 4*

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/GB 96/02639

<b>A. CLASSIFICATION OF SUBJECT MATTER</b> IPC 6 F16D65/16		
According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b> Minimum documentation searched (classification system followed by classification symbols) IPC 6 F16D		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used)		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
E	EP,A,0 743 470 (CONTINENTAL AG ;DAIMLER BENZ AG (DE)) 20 November 1996 see column 4, line 1 - line 12; figure 1 see column 5, line 6 - line 17; figure 4 ---	1-4,6,8
X A	EP,A,0 317 302 (LUCAS IND PLC) 24 May 1989 see column 5, line 16 - line 22; figure 4 ---	1,2,5 4,6
X	US,A,4 836 338 (TAIG ALISTAIR G) 6 June 1989 see column 2, line 37 - line 42 see figures 1,2 see column 3, line 2 - line 4 see column 4, line 4 - line 6 --- <div style="text-align: center;">-/--</div>	1,4-6,8
<div style="display: flex; justify-content: space-between;"> <span><input checked="" type="checkbox"/> Further documents are listed in the continuation of box C.</span> <span><input checked="" type="checkbox"/> Patent family members are listed in annex.</span> </div>		
<div style="display: flex;"> <div style="flex: 1;"> <p>* Special categories of cited documents:</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="flex: 1;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"A" document member of the same patent family</p> </div> </div>		
Date of the actual completion of the international search  <div style="text-align: center; font-size: 1.2em;">12 February 1997</div>		Date of mailing of the international search report  <div style="text-align: center; font-size: 1.2em;">05. 03. 97</div>
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl, Fax (+ 31-70) 340-3016		Authorized officer  <div style="text-align: center; font-size: 1.2em;">Curzi, D</div>



# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/GB 96/02639

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US,A,4 865 162 (MORRIS RICK ET AL) 12 September 1989	1,4,7
A	see column 4, line 41 - line 47 see column 5, line 3 - line 11 see figure 2 ---	5,6
X	US,A,4 596 316 (CROSSMAN RICHARD L) 24 June 1986	1,4,5
A	see column 3, line 6 - line 18 see column 3, line 42 - line 47 see figures 1,2 -----	6

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 96/02639

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A-0743470	20-11-96	DE-A- 19543098 JP-A- 8338461	12-12-96 24-12-96
EP-A-0317302	24-05-89	JP-A- 1257661 US-A- 4941553 EP-A- 0325031 JP-A- 1288637 US-A- 4928797	13-10-89 17-07-90 26-07-89 20-11-89 29-05-90
US-A-4836338	06-06-89	CA-A- 1319329 DE-T- 68907481 EP-A- 0402421 JP-T- 3500920 WO-A- 8910495 US-A- 4877113	22-06-93 16-12-93 19-12-90 28-02-91 02-11-89 31-10-89
US-A-4865162	12-09-89	FR-A- 2608241 GB-A,B 2199097	17-06-88 29-06-88
US-A-4596316	24-06-86	US-A- 4542809 EP-A- 0153265 JP-A- 60184730	24-09-85 28-08-85 20-09-85